

TCM

DIESEL POWERED Pneumatic Tire Truck



6-10t/13000-22000 lbs.

FD60-9 6000 kg/600 mm
13000 lbs/ 24 in

FD80-9 8000 kg/600 mm
17500 lbs/ 24 in

FD70-9 7000 kg/600 mm
15500 lbs/ 24 in

FD100-9 10000 kg/600 mm
22000 lbs/ 24 in

POWERFUL

POWERFUL AND HIGHLY RELIABLE ENGINE

6.373 liter diesel engine S6K

Rated power 82.4kW/2000r.p.m.
112 ps /2000r.p.m.

Rated torque 441N-m/1400r.p.m.
45kgf-m/1400r.p.m.

The engine meets EU Stage-II and U.S.EPA Tier 2 emission control requirements.

SPEEDY

SPEEDY LIFTING

480mm/s (loaded, FD60)

ELECTRONIC CONTROLLED AUTOMATIC TRANSMISSION

Automatic transmission provides reliable travel control incorporated with a low effort single electronic control lever.



FRIENDLY

**ENVIRONMENT FRIENDLY
BLACK SMOKE SAVINGS OF 30%
NOXIOUS SUBSTANCE SAVINGS OF 50%**

LOW NOISE

85dB (A) (at operators ear, according to ISO)

GREATER VISIBILITY

Excellent forward and upward visibility (top in class)
20% wider than previous model.



®Features and equipment may vary depending on market

STANDARD SPECIFICATIONS



				TCM		
Characteristics	1	Manufacturer				
	2	Model		FD60-9	FD70-9	
	3	Loading Capacity		kg (lbs)	6000 (13000) / 7000 (15500)	
	4	Load Center		mm (in.)	600 (24)	
	5	Power Type		Diesel		
	6	Operator Type		Sit Down Rider Type		
	7	Tire Type	Front / Rear	Pneumatic		
	8	Wheels (X = driven)	Front / Rear	4 × 2		
Dimensions	9	Standard Lifting Height		mm (in)		
	10	Free Lift		mm (in)	205 (8.1) / 215 (8.5)	
	13	Fork Size	L × W × T	mm (in)	1220 × 150 × 60 (48.0 × 5.9 × 2.4) / 1220 × 150 × 70 (48.0 × 5.9 × 2.8)	
	14	Tilt Range	Fwd / Bwd	deg	6 / 12	
	15	Length to Fork Face		mm (in)	3535 (139.2) / 3600 (141.7)	
	16	Overall Width		mm (in)	1995 (78.5)	
	17	Mast Height Fork Lowered		mm (in)	2500 (98.4)	
	18	Overall Height, Fork Raised		mm (in)	4420 (174.0)	
	19	Overhead Guard Height***		mm (in)	2500 (98.4)	
	21	Turning Radius (Outside)		mm (in)	3300 (130.0) / 3360 (132.3)	
	22	Fork Overhang (Centerline of Front Axle to Front Fork Face)		mm (in)	615 (24.2) / 625 (24.6)	
23	Basic Right Angle Stacking Aisle Width		mm (in)	5550 (218.5) / 5620 (221.3)		
Performance	24	Travel Max.	With Load	km / h (mph)	25 (15.5)	
			Without Load	km / h (mph)	28 (17.4)	
	25	Lifting	With Load	mm / s (fpm)	480 (94.5) / 460 (90.5)	
			Without Load	mm / s (fpm)	520 (102.3)	
	26	Lowering	With Load	mm / s (fpm)	450 (88.6)	
			Without Load	mm / s (fpm)	500 (98.4)	
28	Max. Drawbar Pull		With / without load	kN (lbs)	53.9 (12100) / 22.1 (4960) / 52.9 (11900) / 21.6 (4850)	
29	Gradeability at (1.6km/h or 1mph)		With Load	% (tan θ)	33 / 29	
30	Max. Gradeability**		With / without load	% (tan θ)	38 / 19 / 33 / 19	
Weight	32	Total Weight		kg (lbs)	8650 (19070) / 9380 (20680)	
	33	Weight Distribution	With Load	Front	kg (lbs)	13050 (28770) / 14540 (32060)
			Rear	kg (lbs)	1600 (3530) / 1840 (4060)	
	34	Without Load	Front	kg (lbs)	3820 (8420) / 3760 (8290)	
Rear			kg (lbs)	4830 (10650) / 5620 (12390)		
Brakes and Tires	35	Number	Front / Rear	4 / 2		
	36	Tire	Size	Front	8.25 × 15 - 12PR / 8.25 × 15 - 14PR	
			Rear	8.25 × 15 - 12PR / 8.25 × 15 - 14PR		
	38	Wheelbase		mm (in)	2250 (88.6)	
	39	Tread	Front	mm (in)	1470 (57.9)	
			Rear	mm (in)	1700 (66.9)	
40	Underclearance	at lowest point	mm (in)	190 (7.5)		
41		at Frame	mm (in)	250 (9.8)		
42	Brake	Service	Hydraulic-Foot pedal			
43		Parking	Mechanical — Hand lever			
Engine and Transmission	45	Battery		Voltage / Capacity		
	49	Make-Model		MITSUBISHI S6K-E5T		
	50	Rated Horsepower / r.p.m.		82.4kW/2000r.p.m.:112ps/2000r.p.m. (SAE GROSS 107.1HP/2000r.p.m)		
	51	Internal Combustion Engine		Rate Torque / r.p.m.		
	52	Number of Cylinder		6		
	52	Displacement		lit (cu-in)	6.373 (388.9)	
	52	Fuel Tank Capacity		lit (US gal)	140 (37.0)	
55	Transmission		Number of Speed Fwd / Rvs — Type			
57	Operating Pressure		For Attachment	kg / cm ² (psi)	200 (2844)	

** Computed values (Travel speed 0km/h) *** In European Export Units + 10mm (0.4 in)



LOAD CHART

TCM	
FD80-9	FD100-9
8000 (17500)	10000 (22000)
600 (24)	
Diesel	
Sit Down Rider Type	
Pneumatic	
4 × 2	
3000 (118)	
205 (8.1)	
20 × 170 × 75 (48.0 × 6.7 × 3.0)	1220 × 180 × 75 (48.0 × 7.1 × 3.0)
6 / 12	
3940 (155.1)	4255 (167.5)
2165 (85.2)	2245 (88.4)
2700 (106.3)	2850 (112.2)
4420 (174.0)	4330 (170.5)
2610 (102.8)	
3650 (143.7)	3900 (153.5)
720 (28.3)	710 (28.0)
6015 (236.8)	6250 (246.1)
25 (15.5)	
28 (17.4)	
380 (74.8)	320 (63.0)
420 (8.27)	350 (68.9)
450 (88.6)	470 (92.5)
450 (88.6)	340 (66.9)
57.3 (12900) / 27.4 (6150)	57.3 (12900) / 31.4 (7050)
27	22
29 / 19	24 / 20
10980 (24210)	12320 (27170)
17040 (37570)	20110 (44340)
1940 (4280)	2210 (4870)
4820 (10630)	5430 (11970)
6160 (13580)	6890 (15190)
4 / 2	
9.00 × 20 — 12PR	9.00 × 20 — 14PR
9.00 × 20 — 12PR	9.00 × 20 — 14PR
2500 (98.4)	2800 (110.2)
1600 (63.0)	
1700 (66.9)	
245 (9.6)	
330 (13.0)	
Hydraulic — Foot pedal	
Mechanical — Hand lever	
2 × 12V — 70AH / 20h	
MITSUBISHI S6K-E5T	
82.4kW/2000r.p.m. : 112ps/2000r.p.m. (SAE GROSS 107.1HP/2000r.p.m)	
441N · m / 1400r.p.m. : 45kgf · m/1400r.p.m. (SAE GROSS 330ft · lbs/1400r.p.m)	
6	
6.373 (388.9)	
140 (37.0)	
2 / 2 — Automatic Powershift	
200 (2844)	

FD60-9 • FD70-9

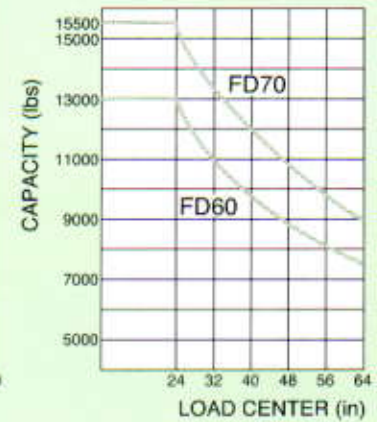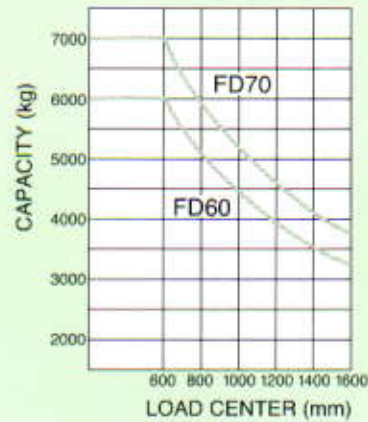

FD80-9 • FD100-9

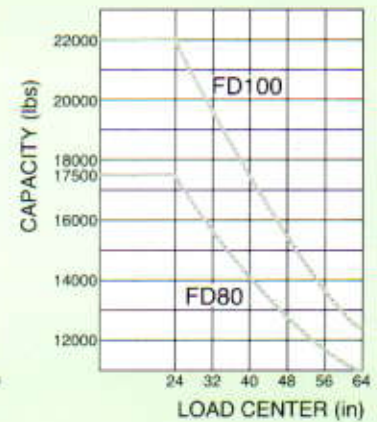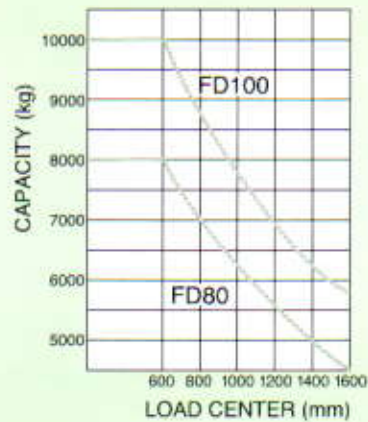

STANDARD EQUIPMENTS

- Wide View Mast • Cyclopak air cleaner with dust indicator • Load check valve
- Glow plug indicator • Drawbar-pin • Starter switch • Load backrest • Long life tires
- Overhead Guard • Power brake • Power steering • Automatic shifting T/M
- Column shift direction change • Radiator reserve tank • Retaining Rollers
- Full wide carriage • Converter oil cooler • Head & turn signal lights • Charging light
- Hour meter • Engine oil pressure warning light • Water temperature gauge
- Fuel gauge • Back-up light • Horn • Key switch engine stop • Neutral safety switch
- Documents clip • Rear view mirrors • Tool set • Back-up buzzer • Suspension seat
- Tilt adjustable handle

OPTIONAL EQUIPMENTS & ACCESSORIES

- Central greasing • Cold weather spec. • Catalytic muffler • Fire extinguisher
- Steel Cabin • Heater • Port relief valves • Rear working light
- Right hand direction change • Solid tires • Spark arrest muffler • Overhead exhaust
- Water separator • Tilt cylinder boots • Strober light • Steel net on head guard
- Speedometer • Plate fin radiator • And others on request.

ATTACHMENTS



- Side shift • Fork positioner • Hinged Forks • Ram • Fork extension sleeves
- Long forks • Load grab • etc.

NOTES

- Overhead guard meets ANSI B56.1 and ISO-6055
- Meets following major standards
 - JIS D6001 Industrial Lift Trucks
 - ISO-1074 Counter Balanced Lift Trucks, Stability & Safety Test
 - ANSI B56.1 Low & High Lift Truck, required by OSHA sec. 1910.178(a)
 - FEM Safety Code of Lift Trucks
 - DIN Safety Code of Lift Trucks

STANDARD DIMENSIONS

FD60-9 • 70-9 • 80-9 • 90-9 • 100-9

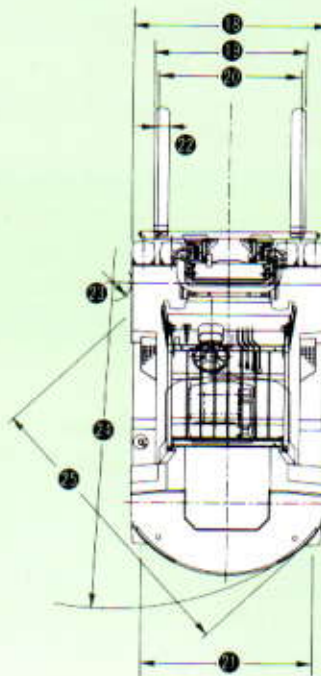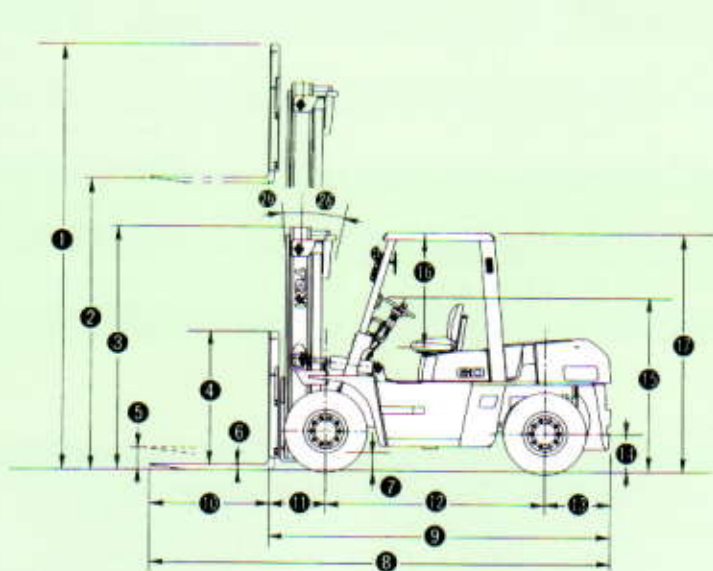

UNDER CLEARANCE

- Upright : ●195mm (7.7 in) ○△245mm (9.7 in)
- Frame center : ●250mm (9.8 in) ○△330mm (13.0 in)
- Drive/Steel Axle : ●190mm (7.5 in)/245mm (9.7 in) ○△265mm (10.4 in)/325mm (12.8 in)
- Counter weight : ●300mm (11.8 in) ○△380mm (15.0 in)

NOTES

- Counter weight height : ●1450/1455mm (57.1/57.3in) ○1560mm (61.4in) △1560mm(61.4in)
- Load backrest width : ●1995mm (78.5 in) ○2165mm (85.2 in) △ not available
- Carriage : ●Width 1845mm (72.6 in), ITA mounting Type IV ○Width 2015mm (79.3 in), ITA mounting Type IV
△Width 2140mm (84.3 in), Shaft Type.

●FD60/70 ○FD80 △FD100

Models	FD60-9		FD70-9		FD80-9		FD100-9	
	mm	in	mm	in	mm	in	mm	in
① Overall height, Fork Raised (with backrest)	4420	174.0	4420	174.0	4420	174.0	4330	170.5
② Standard lifting height	3000	118.0	3000	118.0	3000	118.0	3000	118.0
③ Mast height, Fork lowered (upright)	2500	98.4	2500	98.4	2700	106.3	2850	112.2
④ Load backrest height	1370	53.9	1365	53.7	1360	53.5		
⑤ Free lift	205	8.1	215	8.5	205	8.1	205	8.1
⑥ Fork thickness	60	2.4	70	2.8	75	3.0	75	3.0
⑦ Min. underclearance	190	7.5	190	7.5	245	9.6	245	9.6
⑧ Overall length (with forks)	4760	187.4	4835	190.4	5180	203.9	5470	215.4
⑨ Overall length (without forks)	3535	139.2	3600	141.7	3940	155.1	4255	167.5
⑩ Fork length	1220	48.0	1220	48.0	1220	48.0	1220	48.0
⑪ Fork overhang	615	24.2	625	24.6	720	28.3	710	28.0
⑫ Wheelbase	2250	88.6	2250	88.6	2500	98.4	2800	110.2
⑬ Rear overhang	675	26.6	740	29.1	740	29.1	740	29.1
⑭ Coupler height	510	20.1	510	20.1	620	24.4	620	24.4
⑮ Machine height (without overhead guard and mast)*	1800	70.9	1800	70.9	1910	75.2	1910	75.2
⑯ Overhead guard clearance (from face of seat)**	1100	43.3	1100	43.3	1100	43.3	1100	43.3
⑰ Overhead guard height***	2500	98.4	2500	98.4	2610	102.8	2610	102.8
⑱ Overall width	1995	78.5	1995	78.5	2165	85.2	2245	88.4
⑲ Lateral fork adjustment (outside of forks)	300-1835	11.8-72.2	300-1835	11.8-72.2	340-2000	13.4-78.7	405-2145	15.9-84.4
⑳ Tread (front)	1470	57.9	1470	57.9	1600	63.0	1600	63.0
㉑ Tread (rear)	1700	66.9	1700	66.9	1700	66.9	1700	66.9
㉒ Fork width	150	5.9	150	5.9	170	6.7	180	7.1
㉓ Inside turning radius	200	7.9	200	7.9	200	7.9	200	7.9
㉔ Outside turning radius	3300	130.0	3360	132.3	3650	143.7	3900	153.5
㉕ Min. intersecting aisle	2980	117.3	3020	118.9	3290	129.5	3540	139.4
㉖ Tilt range (forward-backward)	6°-12°		6°-12°		6°-12°		6°-12°	

* In Scandinavian Export Unit +120mm (4.7 in)

** In European Export Unit +50mm (2.0 in)

*** In European Export Unit +10mm (0.4 in)

FD60-9, FD70-9 Wide View Mast VM

Upright Model	Capacity at Load Center 600mm (24 in)				Max. Fork height		Overall Mast Height				Free Lift with Backrest				Tilting Angle Fwd—Bkd Degree	Service Weight with Backrest			
	FD60-9		FD70-9				Lowered		Raised with Backrest		FD60-9		FD70-9			FD60-9		FD70-9	
	kg	lbs	kg	lbs	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs	kg
VM300	6000	13000	7000	15500	3000	118.0	2500	98.4	4420	174.0	205	8.1	210	8.3	6—12	8650	19070	9380	20680
VM330	6000	13000	7000	15500	3300	130.0	2650	104.4	4720	185.8	205	8.1	210	8.3	6—12	8700	19180	9430	20790
VM350	6000	13000	7000	15500	3500	137.8	2750	108.3	4920	193.7	205	8.1	210	8.3	6—12	8730	19250	9460	20860
VM400	6000	13000	7000	15500	4000	157.5	3050	120.1	5420	213.4	205	8.1	210	8.3	6—12	8920	19660	9650	21270
VM450	6000	13000	7000	15500	4500	177.2	3300	130.0	5920	233.1	205	8.1	210	8.3	6—12	9010	19860	9740	21470
VM500	6000	13000	7000	15500	5000	196.9	3550	139.8	6420	252.8	205	8.1	210	8.3	6—6	9120	20110	9850	21720
VM550	5700	12500	6600	14500	5500	216.5	3850	151.6	6920	272.4	205	8.1	210	8.3	3—6	9320	20550	10050	22160
VM600	5400	11900	6400	14100	6000	236.2	4100	161.4	7420	292.1	205	8.1	210	8.3	3—6	9400	20720	10130	22330

FD60-9, FD70-9 Wide View Full Free 2-Stage Mast VFM

Upright Model	Capacity at Load Center 600mm (24 in)				Max. Fork height		Overall Mast Height				Free Lift with Backrest				Tilting Angle Fwd—Bkd Degree	Service Weight with Backrest			
	FD60-9		FD70-9				Lowered		Raised with Backrest		FD60-9		FD70-9			FD60-9		FD70-9	
	kg	lbs	kg	lbs	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs	kg
VFM300	6000	13000	7000	15500	3000	118.0	2625	103.4	4420	174.0	1255	49.4	1265	49.8	6—12	8775	19350	9485	20920
VFM330	6000	13000	7000	15500	3300	130.0	2775	109.3	4720	185.8	1405	55.3	1415	55.7	6—12	8825	19460	9535	21030
VFM350	6000	13000	7000	15500	3500	137.8	2875	113.2	4920	193.7	1505	59.3	1515	59.6	6—12	8855	19530	9565	21090
VFM400	6000	13000	7000	15500	4000	157.5	3175	125.0	5420	213.4	1805	71.1	1815	71.5	6—12	9055	19970	9765	21530
VFM450	6000	13000	7000	15500	4500	177.2	3425	134.9	5920	233.1	2055	80.9	2065	81.3	6—12	9135	20140	9845	21710

NOTE: VFM MAST

Lifting speed : 350mm/s (69fpm) with load, 380mm/s (75fpm) without load
 Lowering speed : 320mm/s (63fpm) with load, 250mm/s (49fpm) without load

Service weight : Without backrest FD60 – 54kg (- 120 lbs), FD70 – 59kg (- 130 lbs)
 Without Backrest : Free lift + 325mm (+ 12.8 in).
 : Overall Mast Height (Raised) – 325mm (- 12.8 in).

FD60-9, FD70-9 Wide View Full Free 3-Stage Mast VFHM

Upright Model	Capacity at Load Center 600mm (24 in)				Max. Fork height		Overall Mast Height				Free Lift with Backrest				Tilting Angle Fwd—Bkd Degree	Service Weight with Backrest			
	FD60-9		FD70-9				Lowered		Raised with Backrest		FD60-9		FD70-9			FD60-9		FD70-9	
	kg	lbs	kg	lbs	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs	kg
VFHM400	5500	12150	6200	13650	4000	157.5	2500	98.4	5400	212.6	1130	44.5	1140	44.9	6—10	9275	20450	9985	22020
VFHM435	5500	12150	6200	13650	4350	171.3	2625	103.3	5750	226.4	1255	49.4	1265	49.8	6—10	9355	20630	10065	22200
VFHM480	5500	12150	6200	13650	4800	189.0	2775	109.3	6200	244.1	1405	55.3	1415	55.7	6—10	9435	20810	10145	22370
VFHM500	5500	12150	6200	13650	5000	196.9	2875	113.2	6400	252.0	1505	59.3	1515	59.6	6—10	9490	20930	10200	22490
VFHM600	5000	11050	5500	12150	6000	236.2	3300	130.0	7400	291.3	1930	76.0	1940	76.4	3—6	9850	21720	10560	23290
VFHM700	3500	7700	3700	8150	7000	275.6	3675	144.7	8400	330.7	2305	90.7	2315	91.1	3—6	10035	22130	10745	23690
VFHM800	2200	4850	2300	5050	8000	315.0	4100	161.4	9400	370.1	2730	107.5	2740	107.9	3—6	10360	22850	11070	24410

NOTE: VFHM MAST

Lifting speed : 350mm/s (69fpm) with load, 380mm/s (75fpm) without load
 Lowering speed : 320mm/s (63fpm) with load, 250mm/s (49fpm) without load

Service weight : Without backrest FD60 – 54kg (- 120 lbs), FD70 – 59kg (- 130 lbs)
 Without Backrest : Free lift + 325mm (+ 12.8 in).
 : Overall Mast Height (Raised) – 325mm (- 12.8 in).

FD80-9 Wide View Mast VM

Upright Model	Capacity at Load Center 600mm (24 in)		Max. Fork Height		Overall Mast Height				Free Lift with Backrest		Tilting Angle Fwd—Bkd	Service Weight with Backrest	
					Lowered		Raised with Backrest						
	kg	lbs	mm	in	mm	in	mm	in	mm	in	Degree	kg	lbs
VM300	8000	17500	3000	118.0	2700	106.3	4420	174.0	200	7.9	6—12	10980	24150
VM330	8000	17500	3300	130.0	2850	112.2	4720	185.8	200	7.9	6—12	11040	24280
VM350	8000	17500	3500	137.8	2950	116.2	4920	193.7	200	7.9	6—12	11080	24370
VM400	8000	17500	4000	157.5	3250	128.0	5420	213.4	200	7.9	6—12	11310	24880
VM450	8000	17500	4500	177.2	3500	137.8	5920	233.1	200	7.9	6—12	11400	25080
VM500	7750	17000	5000	196.9	3750	147.6	6420	252.8	200	7.9	6—6	11500	25300
VM550	7400	16300	5500	216.5	4050	159.5	6920	272.4	200	7.9	3—6	11740	25820
VM600	7000	15400	6000	236.2	4300	169.3	7420	292.1	200	7.9	3—6	11850	26070

FD80-9 Wide View Full Free 2-Stage Mast VFM

Upright Model	Capacity at Load Center 600mm (24 in)		Max. Fork Height		Overall Mast Height				Free Lift with Backrest		Tilting Angle Fwd—Bkd	Service Weight with Backrest	
					Lowered		Raised with Backrest						
	kg	lbs	mm	in	mm	in	mm	in	mm	in	Degree	kg	lbs
VFM300	8000	17500	3000	118.0	2700	106.3	4420	174.0	1345	53.0	6—12	10920	24020
VFM330	8000	17500	3300	130.0	2850	112.2	4720	185.8	1495	58.9	6—12	10970	24130
VFM350	8000	17500	3500	137.8	2950	116.1	4920	193.7	1595	62.8	6—12	11000	24200
VFM400	8000	17500	4000	157.5	3250	128.0	5420	213.4	1895	74.6	6—12	11240	24720
VFM450	8000	17500	4500	177.2	3500	137.8	5920	233.1	2145	84.4	6—12	11330	24920

NOTE: VFM MAST

Lifting speed : 340mm/s (67fpm) with load, 380mm/s (75fpm) without load Service weight : Without backrest -60kg (-130 lbs).
 Lowering speed : 350mm/s (69fpm) with load, 290mm/s (57fpm) without load Without Backrest : Free lift +205mm (+8.1 in).
 : Overall Mast Height (Raised) -205mm (-8.1 in)

FD80-9 Wide View Full Free 3-Stage Mast VFHM

Upright Model	Capacity at Load Center 600mm (24 in)		Max. Fork Height		Overall Mast Height				Free Lift with Backrest		Tilting Angle Fwd—Bkd	Service Weight with Backrest	
					Lowered		Raised with Backrest						
	kg	lbs	mm	in	mm	in	mm	in	mm	in	Degree	kg	lbs
VFHM400	7000	15450	4000	157.5	2575	101.4	5400	212.6	1220	48.0	6—10	11580	25470
VFHM435	7000	15450	4350	171.3	2700	106.3	5750	226.4	1345	53.0	6—10	11650	25630
VFHM480	7000	15450	4800	189.0	2850	112.2	6200	244.1	1495	58.9	6—10	11720	25780
VFHM500	7000	15450	5000	196.9	2950	116.1	6400	252.0	1595	62.8	6—10	11790	25930
VFHM600	6000	13250	6000	236.2	3375	132.9	7400	291.3	2020	79.5	3—6	12150	26730
VFHM700	4500	9900	7000	275.6	3750	147.6	8400	330.7	2395	94.3	3—6	12360	27190
VFHM800	2500	5500	8000	315.0	4175	164.4	9400	370.1	2820	111.0	3—6	13110	28840

NOTE: VFHM MAST

Lifting speed : 340mm/s (67fpm) with load, 380mm/s (75fpm) without load Service weight : Without backrest -60kg (-130 lbs).
 Lowering speed : 350mm/s (69fpm) with load, 290mm/s (57fpm) without load Without Backrest : Free lift +205mm (+8.1 in).
 : Overall Mast Height (Raised) -205mm (-8.1 in)

FD100-9 Wide View Mast VM

Upright Model	Capacity at Load Center 600mm (24 in)		Max. Fork Height		Overall Mast Height				Free Lift		Tilting Angle Fwd—Bkd	Service Weight	
					Lowered		Raised with Backrest						
	kg	lbs	mm	in	mm	in	mm	in	mm	in	Degree	kg	lbs
VM300	10000	22000	3000	118.0	2850	112.2	4330	170.5	200	7.9	6—12	12320	27110
VM330	10000	22000	3300	129.9	3000	118.0	4630	182.3	200	7.9	6—12	12385	27250
VM350	10000	22000	3500	137.8	3100	122.0	4830	190.2	200	7.9	6—12	12430	27350
VM400	10000	22000	4000	157.5	3400	133.9	5330	209.8	200	7.9	6—12	12680	27900
VM450	10000	22000	4500	177.2	3650	143.7	5830	229.5	200	7.9	6—12	12790	28140
VM500	10000	22000	5000	196.9	3900	153.5	6330	249.2	200	7.9	6—6	12890	28360
VM550	9000	19800	5500	216.5	4200	165.4	6830	268.9	200	7.9	3—6	13140	28910
VM600	8000	17600	6000	236.2	4450	175.2	7330	288.6	200	7.9	3—6	13250	29160

TCM products and specifications are subject to change without notice.

Manufactured by



TCM CORPORATION

1-15-5, Nishi-shimbashi Minato-ku,
 Tokyo, 105-0003, Japan
 FAX: JAPAN 3-3591-8152

Distributed by