

ELECTRIC SCISSOR LIFTS

Compact 26/3368 RTE



- Adapted for rough terrain conditions or inside use
- 2 wheel drive
- 12ft 2in x 5ft 1in with extension deck extended
- Maximum load capacity of 1 245lb



Compact 26/3368 RTE

Electric scissor lifts

The Haulotte® advantages



- Fully proportional controls
- Electric scissor lift with a 9,84 in ground clearance allowing exceptional all-terrain performance
- Tight turning radius provides for excellent maneuverability in confined spaces
- Increased workspace area
- Robust, reliable and easy to maintain
- Improved safety due to inclusion of load limiter at the platform

STANDARD FEATURES

- 2 rear drive wheels and 2 front steer wheels
- Tilt alarm
- 2 drive speeds
- One 47in manual slide out extension deck
- Load limiter at the platform with alarm
- Removable control box
- Free wheeling device
- Hourmeter
- Horn
- Side protections
- Towing hooks and lifting eyes
- Safety hooks for harness
- 4 hydraulic brakes
- Emergency lowering system
- Foam filled rough terrain tyres
- Proportional drive control

OPTIONS & ACCESSORIES

- Flashing light
- Work light
- Motion alarm
- Mains electric power outlet at platform
- Biodegradable oil for warm or cold temperature
- Hot countries kit
- Cold countries kit
- Non-marking tyres
- Collapsible handrails
- Traction batteries

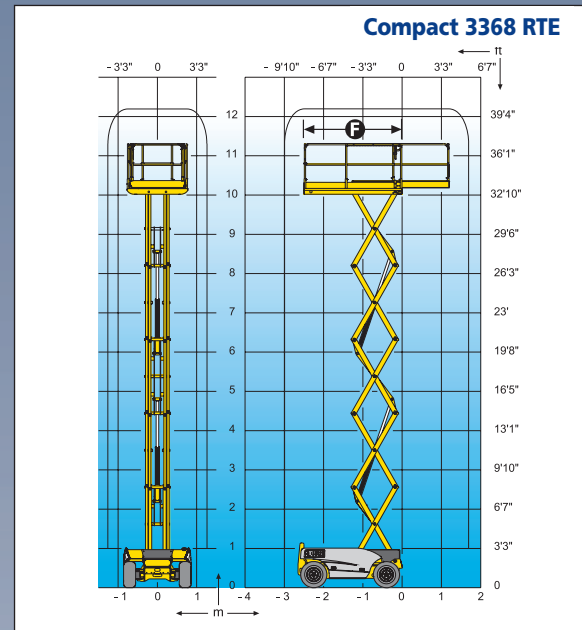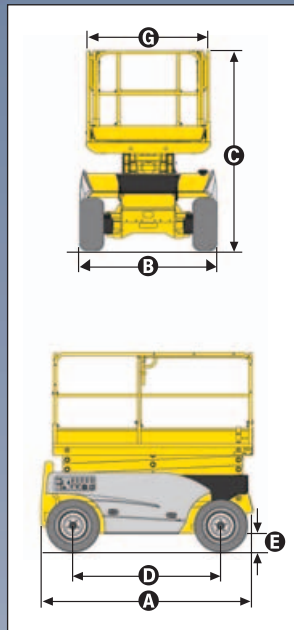

SPECIFICATIONS

	Compact 2668 RTE	Compact 3368 RTE
Working height	32ft 10in	39ft 3in
Platform height	26ft 10in	33ft 3in
Maximum capacity	1245lb	992lb
A Length	8ft 8in	8ft 8in
B Width	5ft 11in	5ft 11in
C Height (guardrails)	7ft 10in	8ft 4in
Height (plat-form)	4 ft 11 in	5 ft 7 in
D Wheelbase	6ft 2in	6ft 2in
E Ground clearance	9,84in	9,84in
F x G Platform size	8ft2in x 5ft 1in	8ft2in x 5ft 1in
Platform extension	47in	47in
Capacity on extension	331lb	331lb
Drive speed	0.62 / 3.6 mph	0.62 / 3.6 mph
Outside turning radius	12ft 5in	12ft 5in
Raise / lower speed (sec.)	35 / 35	
Engine	11,5kw / 48v	
Maximum gradeability	25 %	
Brakes	Hydraulic	
Foam filled tyres	26 x 12 - 12	
Hydraulic tank	45 l	
Semi-traction batteries	48V - 8x6V - 285AH	
Charger	45 A	
Weight	7,452 lb	8,201 lb

ANSI/SIA A92.6 and CSA/B354.2 Standards Compliance



Haulotte 
GROUP

2420328830 - Ed. 12/2005 - Copyright © by Pinguely - Haulotte - products specifications are subject to change without notice - non contractual pictures

HAULOTTE US INC • 7135 Standard drive - Hanover - MD21076 - USA
Tel : +1 410 7124403 • Fax : +1 410 7124419 • Toll free : +1 877-HAULOTTE • e-mail: sales@us.haulotte.com

Haulotte Group - La Péronnière - BP 9 - 42152 l'Horme - France • Tél : +33 (0)4 77 29 24 24 - Fax : +33 (0)4 77 29 43 95
e.mail - haulotte@haulotte.com • web : http://www.haulotte.com