

ELECTRIC SCISSOR LIFTS



COMPACT[®] 22/27/3347E



- Compact[®] 2747E:
990 lb platform capacity
- Compact[®] 3347E:
660 lb platform capacity
- 3 ft platform extension
- 5 in ground clearance
- Pot Hole protection



COMPACT[®] 22/27/3347E

Electric Scissor Lifts

The Haulotte[®] advantages



- Compact[®] 2247E: 990 lb platform capacity
- Compact[®] 2747E: 990 lb platform capacity
- Compact[®] 3347E: 660 lb platform capacity
- 47 in width allows operation in the most congested areas
- Pot Hole protection ensures maximum safety
- High battery capacity
- Robust, reliable and easy to maintain

STANDARD FEATURES

- Non marking tires
- 3 ft platform extension
- Tilt alarm
- 2 proportional drive speeds
- 2 wheel drive and steer
- Free wheeling device
- 24 V - (4 x 6 V) - 250 Ah batteries
- 30 amp battery charger
- Battery charge indicator
- Hourmeter
- Towing hooks / lifting brackets
- Emergency lowering system
- 110 V outlet

OPTIONS & ACCESSORIES

- Flashing light
- Travel alarm
- Fold down handrails
- Work light
- Inverter

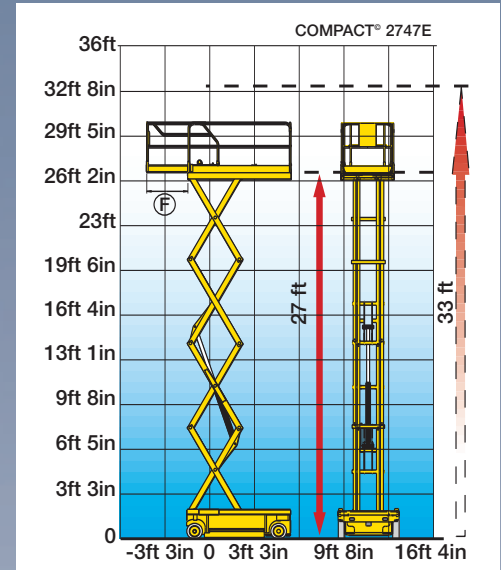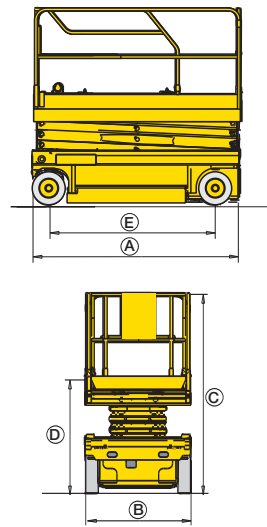

SPECIFICATIONS

	Compact 2247E	Compact 2747E	Compact 3347E
Working Height	26 ft 7 in	32 ft 8 in	38 ft 10 in
Platform Height	20 ft 7 in	26 ft 8 in	32 ft 10 in
Platform capacity	990 lb	990 lb	660 lb
A Stowed Length	7 ft 7 in		
With access steps	8 ft 2 in		
B Width	47 in		
C Stowed height (guardrails)	7 ft	7 ft 5 in	7 ft 10 in
D Stowed height (platform)	3 ft 4 in	3 ft 9 in	4 ft 2 in
E Wheelbase	6 ft 1 in		
Platform size	91 in x 47 in		
F Extension: size	3 ft		
Extension: Capacity	330 lb		
Ground clearance	5 in		
With deployed Pot Hole Protection	1 in		
Drive speed	0.6 mph - 2.2 mph		
Inside turning radius	7 in		
Outside turning radius	8 ft 2 in		
Gradeability	23%		
Raise/ Lower speed	44 / 56 sec.	51 / 42 sec.	85 / 50 sec.
Controls	Proportional		
Batteries	24 V - 250 Ah		
Tires (solid / non marking)	15 x 5 x 2 in		
Weight	4,300 lb	5,135 lb	5,800 lb

ANSI/SIA A92.6 and CSA/B354.2 Standards Compliance



HAULOTTE us Inc - 7135 STANDARD DRIVE - HANOVER MD 21076 - USA
PHONE : +1 410 712 4403 - FAX : +1 410 712 4419
Main Toll Free : +1 877-HAULOTTE - e-mail : sales@us.haulotte.com

Haulotte Group - La Péronnière - BP 9 -42152 l'Horme - France

Tél : +33 (0)4 77 29 24 24 - Fax : +33 (0)4 77 29 43 95 - e-mail : haulotte@haulotte.com - web : http://www.haulotte.com

Haulotte
GROUP