

ROUGH-TERRAIN SCISSOR LIFTS

HS3388RT XL
HS4388RT XL
HS5388RT XL



- 23ft 11in x 6ft 3in platform.*
- 1544 lb platform capacity.
- Rated capacity includes twin extension decks.
- 40% gradeability.
- Standard 4 wheel drive.

* with both extension decks fully extended.



HS3388RT XL HS4388RT XL HS5388RT XL

Rough-terrain scissor lifts

The Haulotte® advantages



- Double extension decks for increased working area
- Hydraulic differential lock for improved rough terrain capability
- Maximum drive speed : 3,7 mph
- Compact stowed height and width makes transportation and manoeuvrability easier
- Quick acting stabilisers suitable for levelling on most terrains
- Foam filled tires
- Full proportional controls
- Robust, reliable and easy to maintain design

STANDARD FEATURES

- Hatz "silent pack" diesel engine
- 4 wheel drive (2 front steering wheels)
- Tilt alarm
- Load limiter in platform
- 12 V - 95 Ah batteries
- 14 V - 50 A alternator
- Removable operator's control box
- Free wheeling device
- Hourmeter
- Horn
- Towing hooks
- Hydraulic brakes
- Manual emergency lowering system
- Automatic levelling outriggers

OPTIONS & ACCESSORIES

- Catalytic exhaust
- Rotating beacon
- Travel alarm
- Mains power outlet on platform
- Working light
- Encoded starting device
- Biodegradable hydraulic oil
- Motion alarm for movements and translation
- Non-marking tires
- Cold weather kit
- Hot weather kit
- Dual fuel engine, GM 1.6 L - 41hp (30.6 kW)
- 3 kW Generator

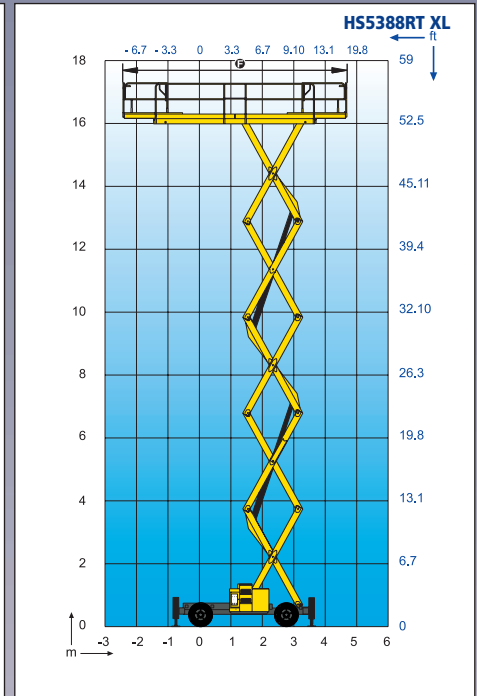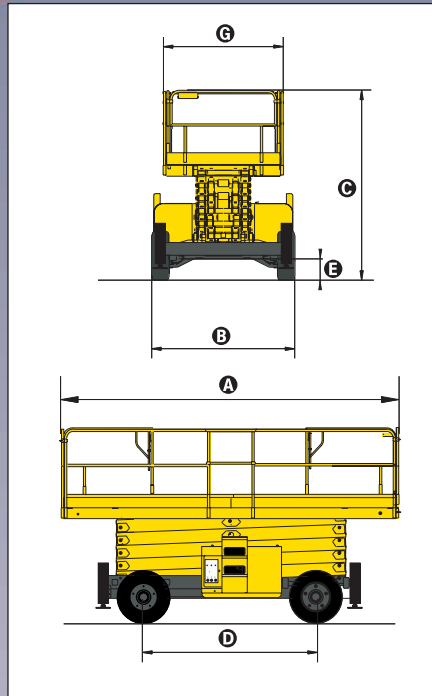

SPECIFICATIONS

	HS3388RT XL	HS4388RT XL	HS5388RT XL
Working Height	39ft 10in	48ft 8in	58ft 6in
Platform Height	33ft 10in	42ft 8in	52ft 6in
Platform Capacity	1544 lb	1103 lb	1103 lb
A Length	17ft 5in		
B Width	7ft 5in		
C Stowed Height	8ft 5in	9ft 1in	9ft 9in
Travel/transport Height	5ft 7in	6ft 3in	6ft 11in
D Wheelbase	9ft 0in		
E Ground clearance	11in		
F x G Platform size	23ft 11in x 6ft 3in		
Platform extension	3ft 3in		
Drive speed	1 - 2 - 3.7 mph		
Outside turning radius	20ft 4in		
Raise / Lower speed	43 / 65 s	46 / 57s	60 / 60 s
Engine	HATZ - 2L41C - 32.6cv - 24kW		
Gradeability	40%		
Tires (Foam Filled)	10 x 16.5"		
Hydraulic tank	100 l / 26 gal		
Fuel tank	65 l / 17 gal		
Weight	12,569 lb	14,399 lb	16,515 lb

ANSI/SIA A92.6 and CSA/B354.2 Standards Compliance



Haulotte 
GROUP

HAULOTTE US INC • 7135 Standard drive - Hanover - MD21076 - USA
Tel : +1 410 7124403 • Fax : +1 410 7124419 • Toll free : +1 877-HAULOTTE • e-mail: sales@us.haulotte.com

Haulotte Group - La Péronnière - BP 9 - 42152 l'Horme - France • Tél : +33 (0)4 77 29 24 24 - Fax : +33 (0)4 77 29 43 95
e.mail - haulotte@haulotte.com • web : http://www.haulotte.com